


MODEL 690UPGKIT BATH FAN UPGRADE KIT



Reduces the sound level of your existing bath fan by up to 45%*. No rewiring or new ductwork required.

FEATURES

FAN ASSEMBLY:

- Plug-in, permanently lubricated motor
- Polymeric blower wheel
- Galvanized steel motor bracket and motor plate
- Fits into your existing bath fan housing

GRILLE:

- White polymeric - blends well with any decor
- Torsion spring grille mounting - no tools required

* In comparison with EC70 and 695C models.

SPECIFICATIONS

VOLTS	AMPS	CFM	SONES
120	1.2	60	3.0

For use only with these bath fan models:**



NuTone 695C, 695CB, 696NC, 696NCB, 690AC



Broan EC50, ECF50, EC70, ECF70, ECH600



Aira VSBP50M, VSBP5XM, VSBX50M

**The kit will work if your housing measures 8¹/₁₆" x 7³/₈".



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

Broan-NuTone Canada Inc., Mississauga, Ontario www.nutone.ca 877-896-1119

TYPICAL SPECIFICATION



Bath Fan Upgrade Kit shall be NuTone Model 690UPGKIT.

Bath Fan Upgrade Kit shall include a galvanized steel motor plate designed to accommodate a variety of economy fan models. Motor shall be removable and permanently lubricated.

Air delivery shall be no less than 60 CFM and sound level no greater than 3.0 sones. All air and sound ratings shall be certified by HVI. Unit shall be cU.L. Listed.

INSTALLATION

Complete installation instructions are included with each kit.

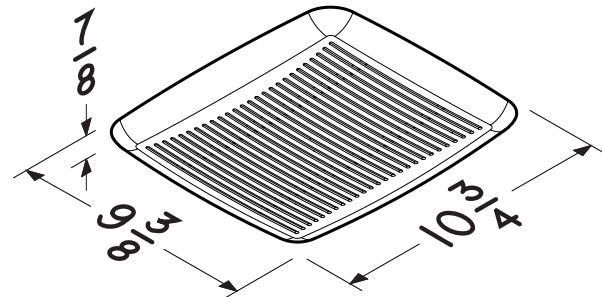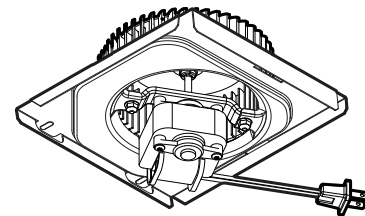

NOTE: Dimensions are in inches.



REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date