BROAN® Elite Pro Style Range Hoods

PURLED

EXCLUSIVE LIGHTING

IMPROVES LIGHT OUTPUT BY 25%	IMPROVES ENERGY EFFICIENCY BY 88%	DISTRIBUTES LIGHT ON COOK SURFACES 6 TIMES BETTER
↑25%	88%	6X

Broan Elite E60000 Series

True professional style and performance has never been easier to bring home.

- 18" wall-mount design
- Dedicated models in all widths for use with external blower options—choice of eight, from 280–1500 CFM
- PURLED™ lighting; two 5.5 watt LED bulbs
- Pro-style, dishwasher-safe baffle filters with handles for convenient removal and removable grease drip rail
- Variable speed control with power on light indicator
- Heat Sentry ™ detects excessive heat and adjusts blower speed automatically
- Designed to duct out of the hood shell in either horizontal or vertical direction with any blower configuration

Dishwasher-safe baffle filters feature handles for convenient removal.

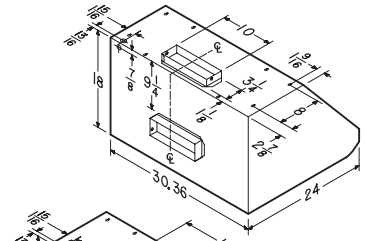

Models
E6030SSLC
E6036SSLC

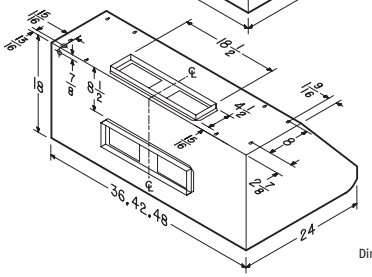

Models
E6036TSSLC
E6042TSSLC
E6048TSSLC0

Dimensions shown are in inches.

SPÉCIFICATIONS

WIDTH	INTERNAL BLOWER* 650 CFM** Duct 3-1/4"x10"	INTERNAL BLOWER* 1290 CFM** Duct 4-1/2" x 18"	EXTERNAL BLOWER* CAPABLE Duct 10" Rd	MAX AMPS◆	SONES AT NORMAL SPEED	OPTIONAL 12" SOFFIT FLUE COVER	OPTIONAL BACK-SPLASH
30"	E6030SSLC		E60E30SSLC	5.5	1.5	AEE60302SS	RMP3004
36"	E6036SSLC	E6036TSSLC	E60E36SSLC	5.5	2.0	AEE60362SS	RMP3604
42"		E6042TSSLC	E60E42SSLC	9.0	2.0	AEE60422SS	RMP4204
48"		E6048TSSLC	E60E48SSLC	9.0	2.0	AEE60482SS	RMP4804

OPTIONS

ARP310***	Air flow reducer (limits the airflow of the hood under 300 CFM)

* Duct adapter & damper is included with the Internal blowers: External blower capable models include the 332KR rough-in kit
** Max blower CFM
*** 650 CFM hoods only
◆ 120V 60Hz

BROAN 1-YEAR WARRANTY

87120B 12/20

Venmar Ventilation ULC
550 Lemire Blvd
Drummondville (Quebec) J2C 7W9

www.Broan-NuTone.ca
1-877-896-1119

Specifications subject to change without notice.
® 2020 Venmar Ventilation ULC

BROAN® Elite

Hottes de style professionnel

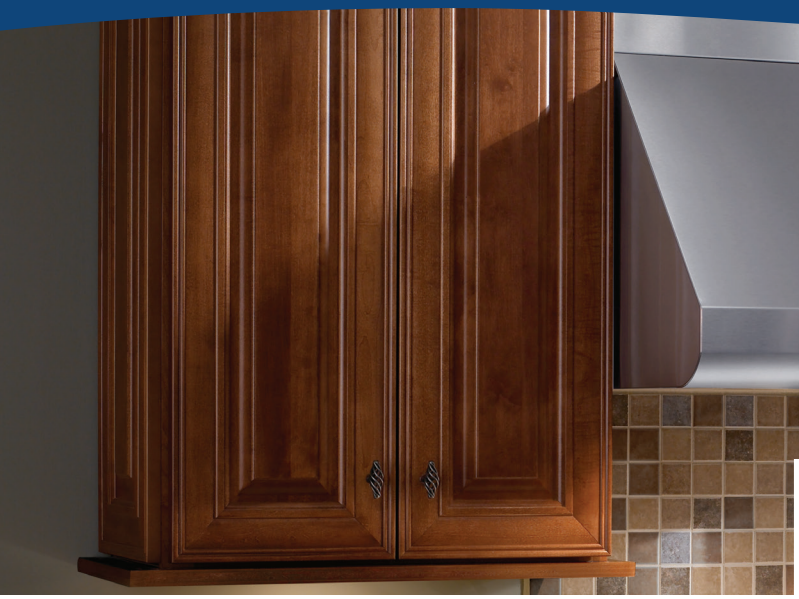

PUR LED

ÉCLAIRAGE EXCLUSIF

AUGMENTE LA PUISSANCE DE L'ÉCLAIRAGE DE 25 %	AMÉLIORE L'EFFICACITÉ ÉNERGÉTIQUE DE 88 %	RÉPARTIT 6 FOIS MIEUX LA LUMIÈRE SUR LA SURFACE DE CUISSON
↑25 %	88 %	6X

Broan Elite, série E60000

Réunir chez soi performance et style professionnel n'aura jamais été aussi facile.

- Modèle de 18 po de hauteur pour installation murale
- Modèles de toute largeur conçus pour fonctionner avec ventilateur extérieur dans un choix de 8 puissances de 280 à 1 500 pcm
- Éclairage PURLED[MC]; deux ampoules DEL de 5,5 watts
- Filtres à chicane de style professionnel allant au lave-vaisselle avec poignées pour faciliter le retrait et gouttière amovible
- Commande de vitesse variable et munie d'un témoin lumineux
- Détecteur Heat Sentry[MC] qui augmente automatiquement la vitesse du ventilateur lorsqu'une chaleur excessive est détectée
- Modèle conçu pour permettre une évacuation horizontale ou verticale

Filtres à chicane allant au lave-vaisselle avec poignée pour en faciliter le retrait.

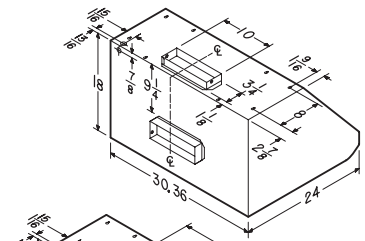

Modèles
E6030SSLC
E6036SSLC

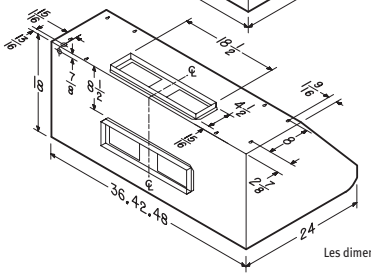

Modèles
E6036TSSLC
E6042TSSLC
E6048TSSLC

Les dimensions indiquées sont en pouces.

SPÉCIFICATIONS

LARGEUR	VENTILATEUR INTÉRIEUR* 650 PCM** Conduit : 3 1/4 x 10 po	VENTILATEUR INTÉRIEUR* 1290 PCM** Conduit : 4 1/2 x 18 po	VENTILATEUR EXTÉRIEUR* Conduit rond : 10 po	A◆ MAX	SONES À VITESSE NORMALE	RALLONGE DE CHEMINÉE 12 PO (optionnel)	DOSSERET (optionnel)
30 po	E6030SSLC		E60E30SSLC	5,5	1,5	AEE60302SS	RMP3004
36 po	E6036SSLC	E6036TSSLC	E60E36SSLC	5,5	2,0	AEE60362SS	RMP3604
42 po		E6042TSSLC	E60E42SSLC	9,0	2,0	AEE60422SS	RMP4204
48 po		E6048TSSLC	E60E48SSLC	9,0	2,0	AEE60482SS	RMP4804

OPTIONS

ARP310***	Réducteur de débit (limite le débit de la hotte à moins de 300 PCM)

* Modèles à ventilateurs intérieurs comprennent adaptateur et volet ; modèles à ventilateur extérieur comprennent la plaque pour ventilateur extérieur 332KR
** Puissance maximale du ventilateur
*** Hotte de 650 PCM seulement
◆ 120V 60Hz

BROAN 1 AN GARANTIE

87120B 12/20

Venmar Ventilation ULC
550, boul. Lemire
Drummondville (Québec) J2C 7W9

www.Broan-NuTone.ca
1 877 896-1119

Les spécifications sont sujettes à changement sans préavis.
® 2020 Venmar Ventilation ULC