

Constructed with quality and good-looks, the BUEZO provides reliable performance whether ducted vertically or horizontally.

SIZE	WHITE ON WHITE	BLACK	GREASE FILTER (replacement)
24-in.	BUEZ024WW		BP29
30-in.	BUEZ030WW	BUEZ030BL	BP29
36-in.	BUEZ036WW		BP29


FEATURES					
Max Blower CFM†	210				
Control type	2-speed Rocker				
Lighting	1-level intensity Designed for LED bulb (not included) A19, E26 base. If using incandescent bulb, 75 Watts max, purchase optional light guard #S99110437.				
Grease Filter	1- Washable aluminum 8¾" x 10½" (BP29 included)				
Installation Hardware	EZ1 brackets				
Heat Sentry	no				
Energy Star	no				
ADA Compatible	yes				
Duct Direction	Vertical/Horizontal (3-1/4 in. x 10 in damper included)				
AC INPUT					
120 V, 60 Hz - 2.0 AMI	PS				
<b>OPTIONAL ACCESSO</b>	RIES				
Electrical Cord Kit	HCK44				
Wall Mount Brackets	35				
ADA Wiring Kit	HAWSK3				
MOUNTING HEIGHT					
18 in. to 24 in. from cooktop to bottom of hood					
LIMITED WARRANTY					
See www.broan-nutone.com for full warranty text.					
FOR INDOOR USE ONLY					

+ Max. blower CFM indicates the performance of the hood blower in open air and is not HVI certified.










## **Under-Cabinet**

## BRSAN

HVI PERFORMANCE								
	Size	Damper	Sones	CFM				
Duct Orientation			High	High @ 0.1 in. w.g.				
Vertical - Rectangular	3¼ in. x 10 in.	Included	8.0	140				
Horizontal - Rectangular	3¼ in. x 10 in.	Included	6.5	150				

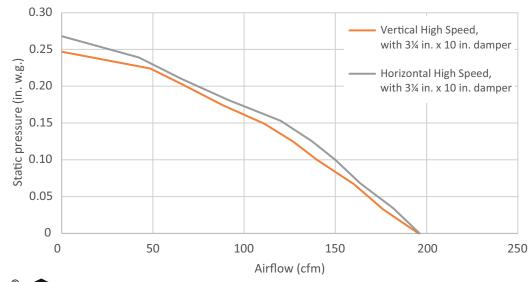

<sup>®</sup> 2100 **HVI** CERTIFIED

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.