SPECIFICATION SHEET



Designed with simplicity in mind, the F40000 range hood models are made to exacting standards and offer the most for the money.

SIZE	WHITE ON WHITE	BLACK	STAINLESS FINISH	STAINLESS	GREASE FILTER (replacement)	NON-DUCT CHARCOAL FILTER
24 in.	F402411	F402423	F4024SF	F402404	BP29	41F
30 in.	F403011	F403023	F4030SF	F403004	BP29	41F
36 in.	F403611	F403623	F4036SF	F403604	BP29	41F

FEATURES				
Max. Blower CFM†	230			
Control type	2-speed rocker switch			
Delay off	no			
Filter Clean Reminder	no			
Heat Sentry™	no			
Lighting	1-level intensity Designed for LED bulb (not included) A19, E26 base. If using incandescent bulb, 75 Watts max, purchase optional light guard #S99110437.			
Grease Filter	Aluminum (Qty. 1)			
ENERGY STAR®	no			
Recirculation	Charcoal filter sold separately			
ADA Compatible	yes			
Duct Direction	Vertical (7 in. round - damper sold separately) Vertical/Horizontal (3-1/4 in. x 10 in damper included)			

AC INPUT

120 V, 60 Hz - 2.5 AMPS

OPTIONAL ACCESSORIES						
3¼ in. x 10 in. to 6-in. Round Duct Transition	411					
7-in. Round Damper	BP87Q					
7-in. Round Adapter Plate	SR680508					
Electrical Cord Kit	HCK44					
ADA Wiring Kit	HAWSK3					

MOUNTING HEIGHT

18 in. to 24 in. from cooktop to bottom of hood

LIMITED WARRANTY


1-year (See installation manual for full warranty text.)

FOR INDOOR USE ONLY

† Max. blower CFM indicates the performance of the hood blower in open air and is not HVI certified.






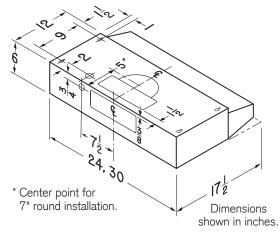



HVI PERFORMANCE											
			Sones		CFM						
Duct Orientation	Size	Damper	Normal	High	Normal	High 0.1 in. w.g.					
Vertical - Rectangular	3¼ in. x 10 in.	Included	4.0	7.5	110	160					
Horizontal - Rectangular	3¼ in. x 10 in.	Included	4.5	7.0	100	160					
Vertical - Round	7 in.	Sold separately	3.5	6.5	140	190					

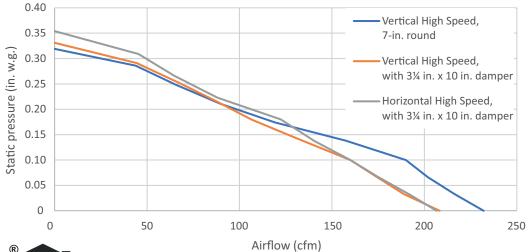



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

SPECIFICATION SHEET